

MK4135

4x130W Stereo Conference Amplifier



Description

MK4135 4-Channel Stereo Conference Amplifier supports 5 MIC inputs and 3 multimedia inputs, 2 recording outputs and 8 speaker interfaces of amplifier output, with MP3 & Bluetooth function, which is applicable to multifunctional classrooms, ordinary classrooms, and small meeting rooms, with full Chinese menu interface, easy to use for domestic users, easy to install and debug, and with clear sound amplification.

Features


- 4 -channel stereo professional power amplifier.
- Brand new appearance design, standard chassis, suitable for standard cabinet installation.
- With MP3 and Bluetooth playback function.
- With one - key switch of anti - howling for the microphone.
- With independent adjustable volume for each channel.
- With a minimum load impedance of 4Ω for stereo work .
- With five microphone inputs and three multimedia inputs.
- With two recording outputs and four speaker interfaces.
- With short-circuit protection, DC protection, power on/off protection and over temperature protection.
- Applicable to multi -functional classrooms, ordinary classrooms, and small meeting rooms.

Specifications


Model	MK4135
Rated Output/Channel, 8Ω	4*130W
Rated Output/Channel, 4Ω	4*180W
Output Interface	8 channels
Input Sensitivity	Music 250MV, MIC 70MV

SNR	≥85d B
Frequency Response	20Hz -20k Hz (±1d B)
Distortion	<0.1%
Channel Crosstalk	< - 62d B
Working Power Supply	AC220 -240V/ 50Hz
Protection	Load short circuit, DC output, power on/off, over temperature
Machine Dimensions	(L ×W × H) 484× 340× 88
Power Supply	AC220V/ 50Hz

Front / Rear Panel

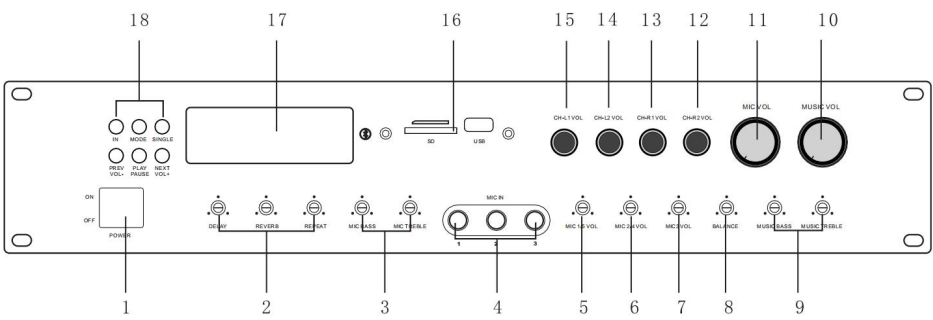

- | | |
|-----------------------------|--|
| 1. POWER | 10. Master Volume Control |
| 2. MIC Reverb Control | 11. MIC Master Volume Control |
| 3. MIC Treble&Bass Control | 12. CH-R2 Volume Control |
| 4. MIC1,MIC2&MIC3 IN | 13. CH-R1 Volume Control |
| 5. MIC1&MIC5 Volume Control | 14. CH-L2 Volume Control |
| 6. MIC2&MIC4 Volume Control | 15. CH-L1 Volume Control |
| 7. MIC3 Volume Control | 16. USB Port & SD Card Slot |
| 8. Balance Volume Control | 17. MP3 Display Screen |
| 9. Treble&Bass Control | 18. MP3 and Music Input Selection Button |

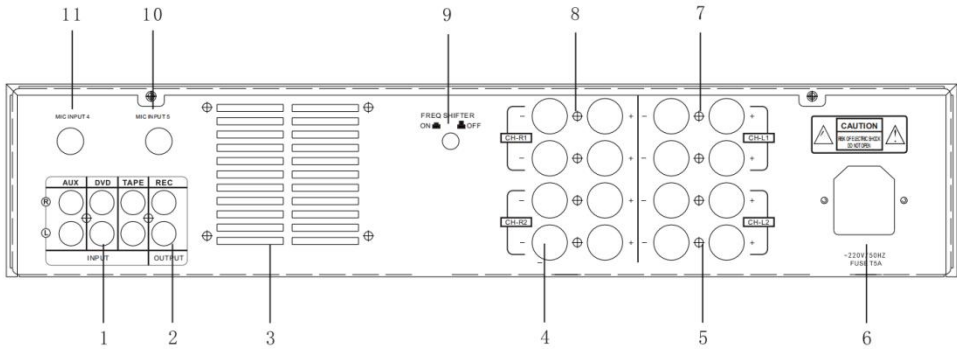

- | | |
|-------------------------|---------------------------|
| 1. 3-channel Inputs | 7. CH-L1 OUT |
| 2. Recording Signal OUT | 8. CH-R1 OUT |
| 3. Cooling Air Outlet | 9. Frequency Shift Switch |
| 4. CH-R2 OUT | 10. MIC5 IN |
| 5. CH-L2 OUT | 11. MIC4 IN |
| 6. AC Power IN (AC220V) | |