


## DSP6011L 6W Ceiling Speaker

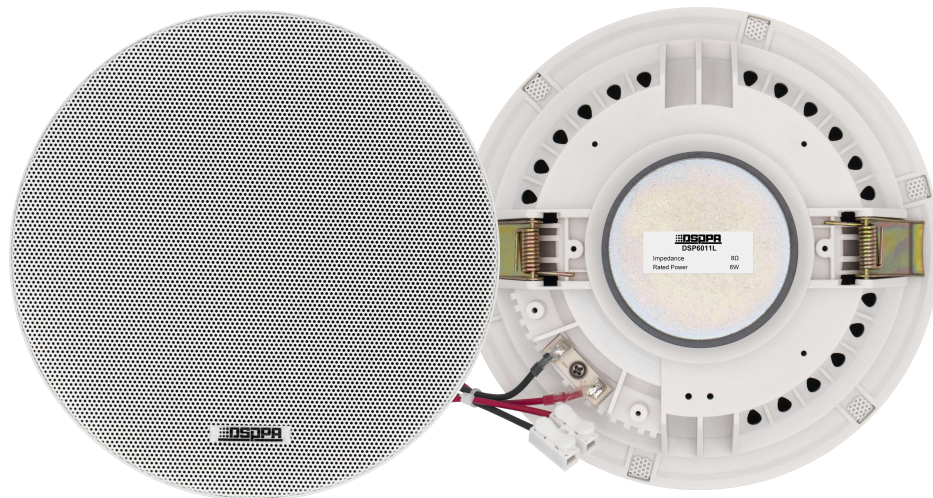

### Description

DSP6011L Ceiling Loudspeaker adopts the fashionable thin-edge plane big cylinder and the carbon alloy aluminum mesh design with the RAL white coating so as to integrate with any indoor place perfectly.

Equipped with a 6.5" full-range designed loudspeaker with magnetic circuit encapsulated with special engineering plastic process, and the drum paper formed with tripping and hot pressing of algae salvaged organisms, for the purpose of super-strong reproduction of voice and music.

It is in conformity with the IEC 268-5 power handling capacity (PHC) standard, and able to operate continuously for 100 hours and carry out simulating acoustic feedback exposure (SAFE) test. It is able to bear the double rated powers within a short period, so as to ensure the high reliability of the loudspeaker under extreme conditions, prolong the service life, and reduce the possibility of occurrence of fault or degradation of performance to a great extent.

### Features


- Super-strong reproduction of voice and music;
- Fashionable design of thin edge, plane, and big cylinder;
- Easy installation, suitable for ceiling in different thickness;
- UV-level highly flame retarding;
- Suitable for hotel, shopping mall, supermarket, school, entertainment and recreation facilities.

| Model                              | DSP6011L      |
|------------------------------------|---------------|
| Speaker Unit                       | 6.5"*1        |
| Effective frequency range          | (110~15k) Hz  |
| Rated Power                        | 6W            |
| Maximum sound pressure level (1m)  | 97dB          |
| Characteristic sensitivity (1m/1w) | 90dB          |
| Storage temperature                | -25°C ~ +55°C |
| Outline dimension                  | 190.5mm*70mm  |
| Weight                             | 0.60kg        |

## Product Information


### Frequency Response

(dB SPL, 1W, 1m)

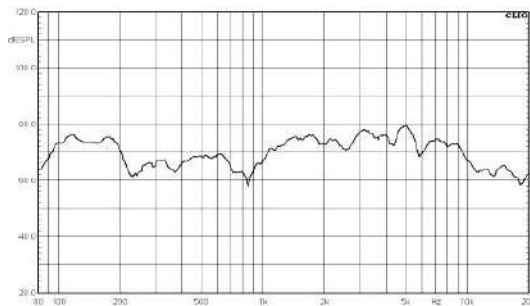

### Distortion Characteristic


(THD < 1.5% 1W, 1m, 200Hz-10kHz)

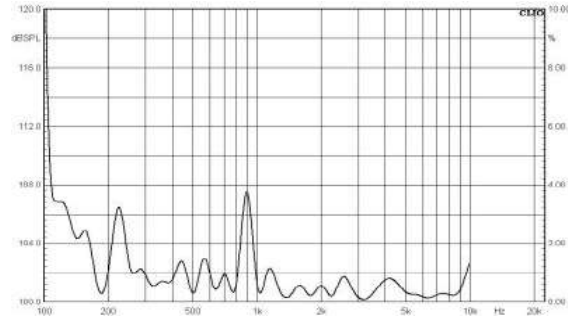


## Installation Steps

1. Cut an installation hole in the diameter of 165-170mm on the ceiling (see the figure below).

Outline Dimension

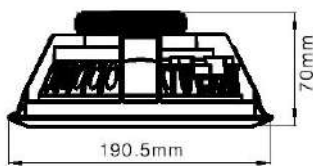


Installation Hole

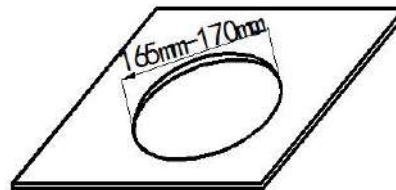

2. The height of the spring clip is suitable for ceilings in different thickness.
3. Connect the audio broadcast transmission line.

|           |    |
|-----------|----|
| Impedance | 8Ω |
| Power     | 6W |

4. Upturn the spring clips of the loudspeaker at both sides and insert into the installation hole, and let go, and then push slightly the loudspeaker into the ceiling (see figure below). **In order to prevent the injury trapped by the spring, it is recommended to wear the working gloves when carrying out this operation.**

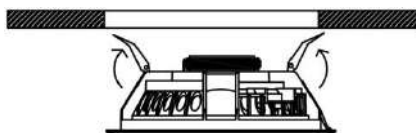

5. Finally, inspect whether it is installed in a firm and reliable way.