



DSP6240 240W Professional Conference Speaker



Description

DSP6240 is a 240W Constant Resistance Professional Conference Speaker that is made of aluminum alloy housing, with extremely textured appearance, which can provide professional-level sound performance and meet the needs of demanding venues.

Features

Rated power: 240W


Freq. Response: 95Hz-18kHz
 Sensitivity (1m,1W): 93±2dB
 Max SPL (1m): 117±2dB

- Streamlined design, simple and beautiful shape, suitable for decoration in various places.
- Adopts a combination of 4.5" fiberglass drum woofer and 1" neodymium tweeter, with wide frequency response, clear bass and bright treble.
- Equipped with a multifunctional mounting bracket for easy installation.
- Durable aluminum alloy housing and aluminum mesh, not easy to deform and rust.

Specifications

| Model | DSP6240 |
|-------------------------|----------------|
| Speaker Unit | 4.5"×8, 1"×1 |
| Rated Impedance | 4Ω |
| Rated Power(RMS) | 240W |
| Freq. Resp. Range | 95Hz-18kHz |
| Sensitivity(1m,1W) | 93±2dB |
| Max.SPL(1m) | 117±2dB |
| Product Size (H×W×D) | 1100×140×155mm |
| Package Size (2PCS/CTN) | 1207×420×225mm |
| Net Weight (1PC) | 14.1kg |
| Gross Weight (2PCS/CTN) | 31.5kg |


Product Information



| Model | Height | Width | Depth |
|---------|--------|-------|-------|
| DSP6240 | 1100 | 140 | 155 |

(Unit: mm)

Frequency Response Characteristics (dB SPL, 1W, 1m)

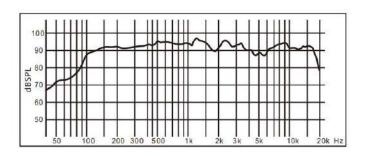

Distortion Characteristics (THD< 3% 1W, 1m, 100Hz-10kHz)

