

DSP6540UT

6.5" 40W Ultra-Thin In-Ceiling Speaker



Description

This 40W ultra-thin ceiling speaker, with a 6.5" PP woofer and 0.75" aluminum tweeter, offers versatile sound for discreet installations. It features power tapping options at 8Ω/40W/20W/10W and a frequency range of 55Hz-20KHz for clear audio. Its slim profile makes it an unobtrusive addition to any ceiling, maintaining the aesthetic of your space while delivering high-quality audio. This ultra-thin in-ceiling speaker is ideal for homes, offices, restaurants, and more, as it brings exceptional listening experiences without compromising on interior design.

Features


- Rate power 40W, ultra thin in-ceiling speaker
- Woofer: 6.5" PP cone, tweeter: 0.75" / 20 mm aluminium cone
- Support 70V/100V/8Ω
- Power Tap: 8Ω/40W/20W/10W
- Freq response: 55Hz-20Khz
- Sensitivity: 88dB±3dB@1M/1W
- Dimension: Ø236.5×78mm
- Cutout: Ø207×73mm

Specifications


Model	DSP6540UT
Drive Unit	6.5"×1, 0.75"×1
Rated Power	40W
Power Tap	8Ω/40W/20W/10W
Input	70V/100V/8Ω
Frequency Response	55Hz-20kHz
Sensitivity(dB,1m,1W)	88dB±3dB
Max. SPL (1m)	104dB±3dB
Distortion	< 8%
Product Size	∅236.5×78mm
Cutout Size	∅207×73mm

Product Information

Frequency Response Characteristic
(dB SPL, 1W,1m)

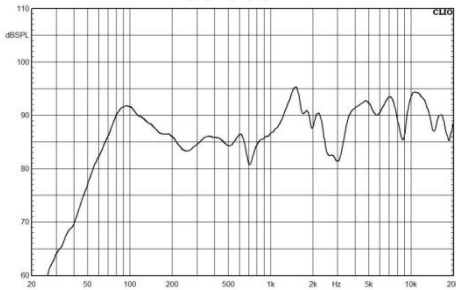

Distortion Characteristic
(THD< 1.5%, 1W, 1m, 100Hz-10kHz)

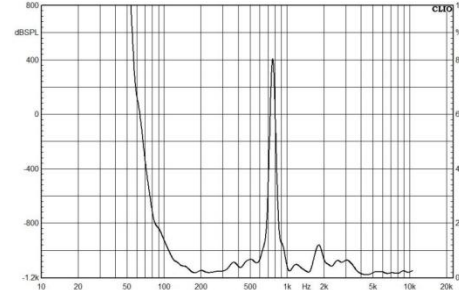

Installation Illustration

