

## DSP901

### 6W Ceiling Speaker with Fire Dome



#### Description

This fireproof ceiling speaker features a 4.5-inch driver unit and a built-in fireproof back cover for enhanced safety. It supports 70V/100V input with multiple power settings and adopts a spring clip design for secure and easy installation, making it suitable for various applications.

#### Features


- The panel is made of flame-retardant plastic, while the speaker's fireproof back shell is crafted from high-quality steel through precision stamping.
- 70/100V, 1.5-6W with multiple terminals, suitable for different field.
- Max. sound pressure level  $96\pm 2\text{dB}$ , effective frequency range 100Hz-16kHz.
- Weight 1.2kg. Equipped with clamps for mounting.
- Sensitivity  $91\pm 2\text{dB}$ , long life, sounds clear and sonorousness.

#### Specifications

Model	DSP901
Speaker Unit	4.5"×1
Rated Power (RMS)	6W
Rated Voltage	70V/100V
Sensitivity (1m, 1W)	91±2dB


MAX. SPL. (1m)	96±2dB
Frequency Response	100Hz-16kHz
Dimensions	Φ168×110mm
Weight	1.2kg

**Frequency Response**  
(dB SPL, 1W, 1m)

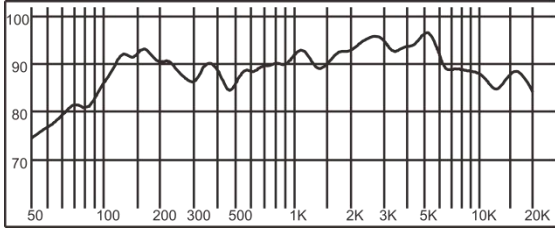


**Distortion**

(THD < 1.5% 1W, 1m, 200Hz-10kHz)

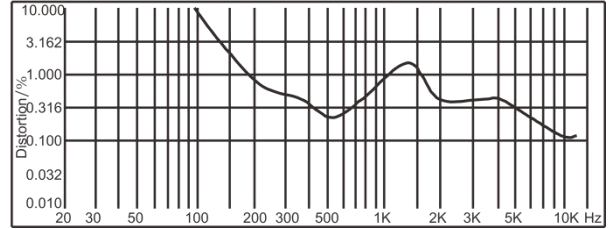

**Dimensions**



**Installation Hole**

